

Smart Access Control

Fingerprint + Proximity/Smart Card Reader



SSA-R2010/R2011

- 125KHz Proximity - Samsung Format / 13.56MHz Mifare contactless Smart Card
- 26 bit Weigand / 34 bit Weigand output format
- 10,000 ID Users
- 1,000 / 2,000 / 4,000 Fingerprint Users
- 1:1 Verification and 1:N Identification with 2 Fingerprint templates
- Master Card for user registration and deletion
- Operating Mode selectable by individual ID (RF only, Fingerprint only, or RF + Fingerprint)
- Tamper Switch

Fingerprint + Proximity/Smart Card Reader

SSA-R2010/R2011




Specifications

	SSA-R2010	SSA-R2020	SSA-R2040	SSA-R2011	SSA-R2021	SSA-R2041
Fingerprint Users	1,000	2,000	4,000	1,000	2,000	4,000
Fingerprint Templates Size	800Bytes for 2 Fingerprint Templates					
Power / Current	DC 12V / Max.290mA			DC 12V / Max.310mA		
Reader Port	External Reader Port 1ea : 26bit Wiegand			External Reader Port 1ea : 34bit Wiegand		
Frequency	125KHz			13.56MHz		
Reading Time (Card)	30ms					
Verification Time	Less than 1sec.					
Identification Time	Less than 2sec.					
Communication	RS232, RS485, TCP/IP					
Baud Rate(bps)	57,600					
Input Port	3ea (External LED Control, External Buzzer Control, Operating Mode (RF/ RF+ Finger) Control)					
Output Port	2ea (Error-Output, OK-Output (Open Collector Output))			26bit Wiegand		
				34bit Wiegand		
LED Indicator	3 LED Indicators (Red, Green and Orange)					
Beeper	Piezo Buzzer					
Voice Output	English					
Operating Temperature	0°C to +50°C (32°F~122°F)					
Operating Humidity	10% to 90% relative humidity non-condensing					
Color / Material	Silver with Black / Polycarbonate					
Dimension (W x H x D)	65.0 x 128.0 x 48.5mm					
Weight	240g			230g		
Fingerprint Module Specifications						
Resolution	500dpi					
Capture Image Size	412 x 302 pixels					
Extraction Image Size	260 x 300 pixels					
Sensing Area	13mm x 15.2mm					
Scanner	High Quality Optical Sensor					
FAR	0.001%					
FRR	0.1%					
ESD	15KV					
Verification Time	Less than 1sec.					
Identification Time	Less than 2sec.					

Dimensions

Unit : mm (inch)

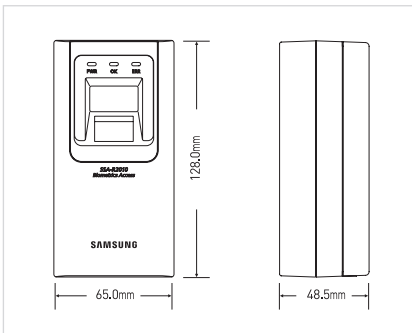

Compatible Cards (Optional)



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741~8749, 8752~8760 Fax : +82-31-8018-3745
www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA INC.
1480 Charles Willard St, Carson, CA 90746, UNITED STATES
Tel Free : +1-877-213-1222 Fax : +1-310-632-2195
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.
Samsung House, 1000 Hillwood Drive, Hillwood Business Park
Chertsey, Surrey, UNITED KINGDOM KT16 0PS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.
No.11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788

■ DISTRIBUTED BY

