



Knock Down Waveguide Ladder Kit

Ladders have 3' (914.4 mm) rung spacing. Available in two widths, 2'3" (701.04 mm) for twelve (12) runs of coax and 1'6" (487.68 mm) for eight (8) runs. Each ladder section is furnished with two (2) splices and hardware to interconnect with the next section. (*Attachment hardware must be purchased separately below.*)


Item #	Description	Wt. lb.	Wt. kg.
C20-128-011	10' (3.05 m) Ladder - 12 holes - 3' (914.4 mm) spacing	46.80	21.23
C20-128-021	20' (6.1 m) Ladder - 12 holes - 3' (914.4 mm) spacing	88.60	40.19
C20-128-015	10' (3.05 m) Ladder - 8 holes - 3' (914.4 mm) spacing	45.00	20.41
C20-128-025	20' (6.1 m) Ladder - 8 holes - 3' (914.4 mm) spacing	80.20	36.38



Waveguide Ladder Hardware Kit

Kits include a J-Bolt and either J-Clips (for angle members) or Ladder Back-Up Plates (for round members). Use one (1) kit for each ladder section.

Item #	Description	Wt. lb.	Wt. kg.
C40-101-004	Universal Angle Kit fits 1 1/2" - 6" (38.1 mm - 152.4 mm) angle (20' (6.1 m) Ladder)	4.40	2.00
C40-101-005	Universal Angle Kit fits 1 1/2" - 6" (38.1 mm - 152.4 mm) angle (5' or 10' (1.52 m or 3.05 m) Ladder)	2.20	1.00
C40-101-021	Universal Kit fits 1 1/2" - 6" (38.1 mm - 152.4 mm) angle or 3/4" to 4 1/2" OD (19.05 mm to 114.3 mm) round (5' or 10' (1.52 m or 3.05 m) Ladder)	3.78	1.71
C40-101-022	Universal Kit fits 1 1/2" - 6" (38.1 mm - 152.4 mm) angle or 3/4" to 4 1/2" OD (19.05 mm to 114.3 mm) round (20' (6.1 m) Ladder)	7.40	3.36

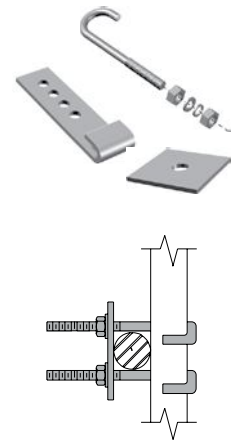

Waveguide Ladder Stacker Kit For Coax Support

Designed to work with Waveguide Ladders (*sold separately above*). Kits come complete with rungs punched with both 3/8" and 3/4" (9.53 mm and 19.05 mm) holes, spacers and all required hardware.

Item #	Description	Wt. lb.	Wt. kg.
C20-129-007	8 additional run Stacker - 20 total runs (3' (914.4 mm) spacing) (Works only with 10' (3.05 m), 12 Hole Waveguide Ladder C20-128-011)	20.00	9.07
C20-129-008	8 additional run Stacker - 20 total runs (3' (914.4 mm) spacing) (Works only with 20' (6.1 m), 12 Hole Waveguide Ladder C20-128-021)	35.00	15.88
C20-129-009	4 additional run Stacker - 12 total runs (3' (914.4 mm) spacing) (Works only with 10' (3.05 m), 8 Hole Waveguide Ladder C20-128-015)	18.00	8.16
C20-129-010	4 additional run Stacker - 12 total runs (3' (914.4 mm) spacing) (Works only with 20' (6.1 m), 8 Hole Waveguide Ladder C20-128-025)	30.00	13.61



Universal Waveguide Standoff Kit

Allows up to twelve (12) lines of coax to be attached to the tower leg. Fits both round and angle members. All hardware is included.

Item #	Description	Wt. lb.	Wt. kg.
C20-150-102	1 1/2" to 5 9/16" OD (38.1 mm to 141.29 mm) leg, 2 1/2" to 4" (63.5 mm to 101.6 mm) angle leg	17.00	7.71
C20-150-101	1 1/2" to 10 3/4" OD (38.1 mm to 273.05 mm) leg, 2 1/2" to 8" (63.5 mm to 203.2 mm) angle leg	28.00	12.70

